



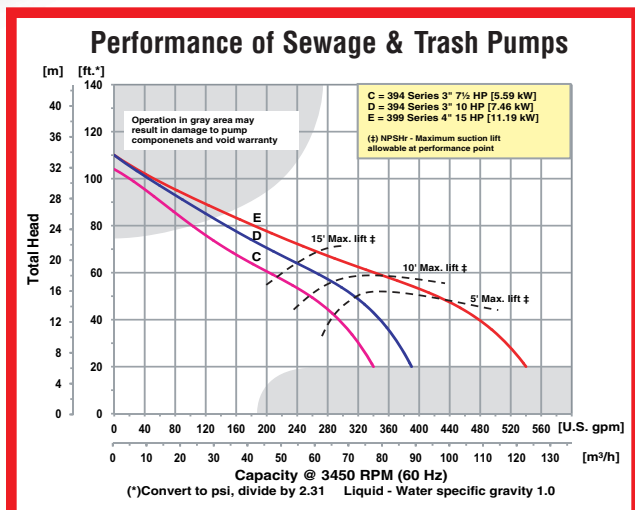

## Cast Iron Sewage & Trash Pumps

- **Cast Iron Construction**
- **Silicon Carbide/Viton® Mechanical Seal**
- **2", 3" & 4" NPT Ports Sizes**
- **Maximum Temperature 180° F**
- **Self-Priming to 20 Ft.**
- **Stainless Steel Semi-Open, Clog Resistant Impeller**
- **Buna-N Check Valve and O-Ring**
- **Removable Cast Iron Volute/Wearplate**
- **Easy Cleanout Design**
- **3" & 4" Models Feature Front Cleanout**
- **Pull-from-Rear Design**
- **Available with 3 to 15 HP Totally Enclosed Fan Cooled (TEFC) Electric Motors**

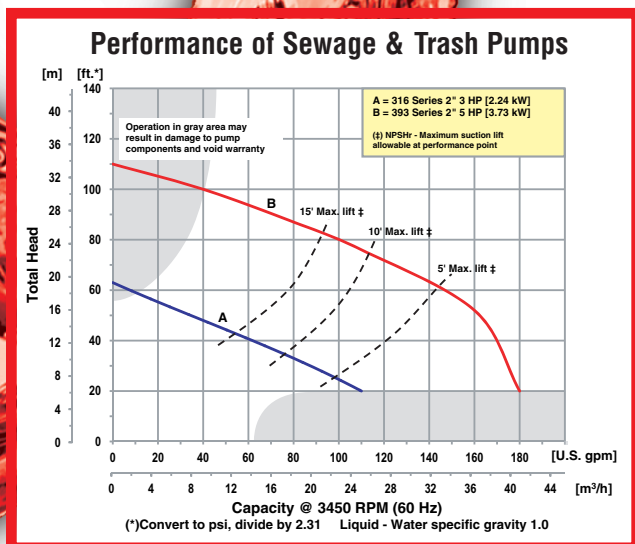

AMT Cast Iron Sewage/Trash pumps are designed for trouble free and economical handling of solids laden liquids and slurries. Pumps are available in three NPT port sizes: 2", 3" or 4". Cast iron construction with two vane stainless steel self-cleaning impellers, silicon carbide mechanical seals for abrasion resistance and Buna-N O-rings and check valves. Built-in check valve allows pump to reprime automatically in an open system without the foot valve. The solids handling capabilities of the pumps make them ideally suited for a variety of industrial applications including: sewage treatment, canneries, chemical processing, wineries, tanneries, meat packing, breweries, pulp, wood chips, process water, sludge and slime, waste water, white water and other applications. These sewage/trash pumps will easily handle liquids containing sewage, stones, sticks, mud and other solids. Minimum liquid requirement must be above 85% — maximum 15% solids. **Failure to do so may damage pump and void warranty.**

## Pump Dimensional & Specification Data

| Model   | HP | SUC* | DIS* | A**        | B         | C**        | D          | E          | F          | G           | J**         | K          | L**         | W**         | H           | Ship Wt. (Lbs.) |
|---------|----|------|------|------------|-----------|------------|------------|------------|------------|-------------|-------------|------------|-------------|-------------|-------------|-----------------|
| 316B-95 | 3  | 2    | 2    | 2.5 [6.3]  | 2.1 [5.3] | 3.8 [9.6]  | 4.0 [10.1] | 4.8 [12.2] | 3.1 [7.8]  | 6.1 [15.4]  | 11.1 [28.2] | 2.4 [6.1]  | 20.3 [51.5] | 9.3 [23.6]  | 8.8 [22.3]  | 94              |
| 316A-95 | 3  | 2    | 2    | 2.5 [6.3]  | 2.1 [5.3] | 3.8 [9.6]  | 4.0 [10.1] | 4.8 [12.2] | 3.1 [7.8]  | 6.1 [15.4]  | 11.1 [28.2] | 2.4 [6.1]  | 19.9 [50.5] | 9.3 [23.6]  | 8.8 [22.3]  | 87              |
| 393B-95 | 5  | 2    | 2    | 3.8 [9.6]  | 2.1 [5.3] | 5.5 [13.9] | 5.2 [13.2] | 4.8 [12.2] | 3.1 [7.8]  | 6.9 [17.5]  | 14.8 [27.6] | 4.4 [11.1] | 27.4 [69.6] | 13.4 [34.0] | 10.0 [25.4] | 189             |
| 393A-95 | 5  | 2    | 2    | 3.8 [9.6]  | 2.1 [5.3] | 5.5 [13.9] | 5.2 [13.2] | 4.8 [12.2] | 3.1 [7.8]  | 6.9 [17.5]  | 14.8 [27.6] | 4.4 [11.1] | 24.9 [63.2] | 12.3 [31.2] | 10.0 [25.4] | 173             |
| 394B-95 | 7½ | 3    | 3    | 4.3 [10.9] | 3.5 [8.8] | 5.5 [13.9] | 6.0 [15.2] | 6.5 [16.5] | 5.0 [12.7] | 9.3 [23.6]  | 16.4 [41.6] | 3.7 [9.4]  | 31.1 [79.0] | 15.5 [39.4] | 12.5 [31.7] | 248             |
| 394A-95 | 7½ | 3    | 3    | 3.8 [9.6]  | 3.5 [8.8] | 5.5 [13.9] | 6.0 [15.2] | 6.5 [16.5] | 5.0 [12.7] | 9.3 [23.6]  | 15.7 [39.7] | 3.7 [9.4]  | 26.6 [67.5] | 13.5 [34.3] | 12.5 [31.7] | 226             |
| 394F-95 | 10 | 3    | 3    | 4.3 [10.9] | 3.5 [8.8] | 7.0 [17.7] | 6.1 [15.4] | 9.0 [22.8] | 8.8 [22.3] | 12.5 [31.7] | 19.7 [50.0] | 3.7 [9.4]  | 34.3 [87.1] | 15.5 [39.4] | 15.1 [38.3] | 450             |
| 394E-95 | 10 | 3    | 3    | 4.3 [10.9] | 3.5 [8.8] | 7.0 [17.7] | 6.1 [15.4] | 9.0 [22.8] | 8.8 [22.3] | 12.5 [31.7] | 19.7 [50.0] | 3.7 [9.4]  | 33.4 [84.8] | 14.3 [36.3] | 15.1 [38.3] | 330             |
| 399C-95 | 15 | 4    | 4    | 4.3 [10.9] | 3.5 [8.8] | 7.0 [17.7] | 6.1 [15.4] | 9.0 [22.8] | 8.8 [22.3] | 12.5 [31.7] | 19.7 [50.0] | 3.7 [9.4]  | 33.4 [84.8] | 14.3 [36.3] | 15.1 [38.3] | 350             |

(\*) Standard NPT (Female) pipe thread.


(\*\*) This dimension may vary due to motor manufacturer's specifications.

NOTE: Dimensions are in inches (centimeters) and have a tolerance of  $\pm 1/4"$ .


| Model              | Curve | HP | PH     | ENC  | Frame          | Voltage @ 60 Hz + | Full Load Amps | Max Solids |
|--------------------|-------|----|--------|------|----------------|-------------------|----------------|------------|
| 316B-95<br>316A-95 | A     | 3  | 1<br>3 | TEFC | 56J            | 230<br>230/460    | 16<br>8/4      | 1"         |
| 393B-95<br>393A-95 | B     | 5  | 1<br>3 | TEFC | 184JM          | 230<br>230/460    | 20<br>17/9     | 1"         |
| 394B-95<br>394A-95 | C     | 7½ | 1<br>3 | TEFC | 215JM<br>184JM | 230<br>230/460    | 31<br>22/11    | 1½"        |
| 394F-95<br>394E-95 | D     | 10 | 1<br>3 | TEFC | 215JM          | 230<br>230/460    | 40<br>26/13    | 1½"        |
| 399C-95            | E     | 15 | 3      | TEFC | 215JM          | 230/460           | 47/24          | 2"         |

(+) 3-Phase models can also operate on 50 Hz (This will change full load amps and service factor, RPM and priming capabilities).

NOTE: Electric supply for ALL motors must be within  $\pm 10\%$  of nameplate voltage rating (e.g. 230V  $\pm 10\%$  = 207 to 253).

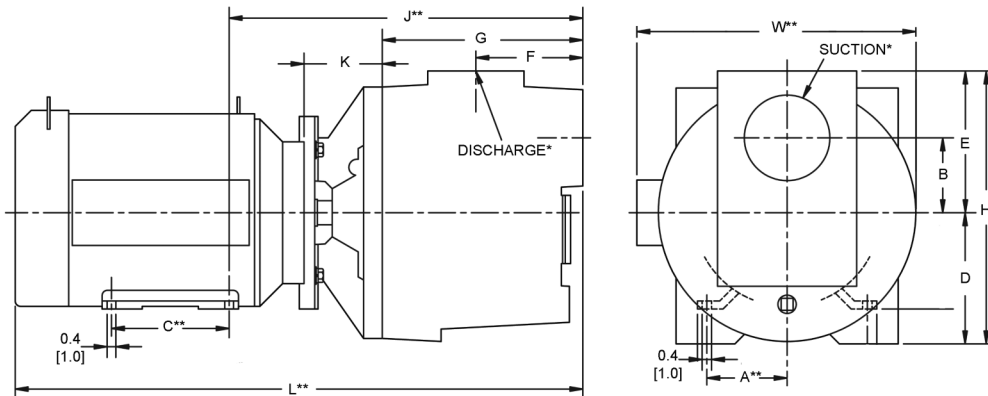

### Optional Mounting Base Model A200-90



## Standard Features

- Cast Iron Construction for Abrasive Resistance and Durability
- Silicon Carbide/Viton® Mechanical Seal
- Built-in Buna-N Check Valve
- Buna-N O-ring Casing Seal Reusable After Clean Out Maintenance
- Self-Cleaning Stainless Steel Impeller Resists Clogging and Wear
- Pull-from-Rear Design Permits Clean Out and Repair Without Removing Piping
- 3" & 4" Models Feature Front Cleanout
- Replaceable Cast Iron Volute/Wearplate Designed for Solids Handling
- Motor Includes Stainless Steel Shaft or Stainless Steel Shaft Sleeve
- Available with 3 to 15 HP Totally Enclosed Fan Cooled (TEFC) Electric Motors
- Single or Three Phase, 3450 RPM Motors
- Optional Mounting Base Available for 184/215 JM Frames
- Maximum Working Pressure 150 PSI
- Seal Flush Port Provided on 5 HP and Larger
- Optional Mounting Base Available
- QSP – Quick Ship Pump for Many Models

**Hazardous Duty/Xplosion Proof motors available from stock ranging from 1 to 10 HP; CALL FOR QUOTATION & LEAD TIME!**